




HYDRAULIC / ELECTRIC  
**ECOFRIDGE LOWLINE 13**

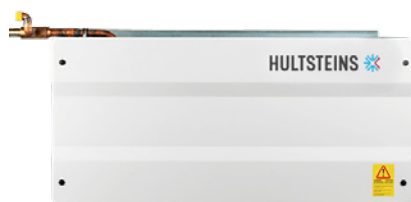

**ECOFRIDGE LOWLINE 13 IS AN ELECTRIC AND HYDRAULIC** powered unit that is designed to be mounted under the box. The unit is supplemented by a separate evaporator and is available in versions with one or more temperature zones.

The unit is equipped with our Display control system and can be fitted with the Intelli Start system.

ECOFRIDGE

# Lowline 13

- ▶ Hydraulic constant flow pump delivers full power regardless of speed
- ▶ Fuel savings of up to 60%
- ▶ Reduced CO<sub>2</sub>, No<sub>x</sub> & PM emissions
- ▶ Lower service costs
- ▶ Mounts under the box
- ▶ Mains connection 400 V
- ▶ Display control system

## FUNCTION

The unit is powered by a hydraulic constant flow pump which is mounted directly on the truck's PTO and provides constant power whatever the engine speed. Can be supplemented by one or more roof evaporators in the box. The unit is available with several temperature zones.

The Intelli Start feature allows the refrigeration system to start and stop the truck engine when parked. The unit can also be connected to the mains. Heat is provided by electric and water heaters.



*Hultsteins under-the-box solution offering several temperature zones.*

## TECHNICAL SPECIFICATIONS


Model	Refrigeration capacity*		Electric power*		Standard heat	Extra heat Water	Multizone	Weight
	Box temp 0°C	Box temp -20°C	Box temp 0°C	Box temp -20°C				
Lowline 13	7,500 W	4,280 W	7,500 W	4,280 W	Yes	No	Option	390 kg

\*Refrigeration capacity specified at +30°C ambient temperature.

Model	Electric heat	Extra heat Water	Weight
Evaporator 13	2800 W	Option	66 kg


## DIMENSIONS

Lowline 13

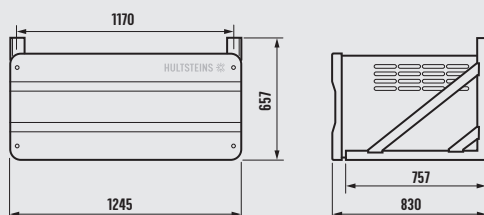

Evaporator 13

Dimensions in mm

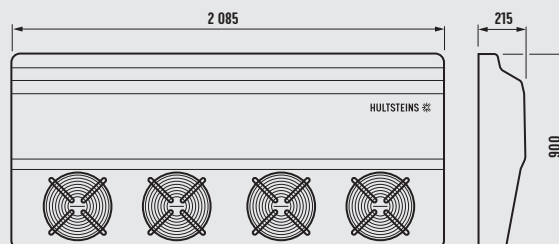
**HULTSTEINS** 